

# Soft Switching Bidirectional DC-DC converter for Hybrid Electric Vehicle Applications

M. Sravanthi<sup>1</sup>, B. Linganna<sup>2</sup>, N. Revathi<sup>3</sup>

<sup>1, 2, 3</sup> Assistant Professor, Electrical and Electronics Department, Hyderabad, Telangana, India

<sup>1, 3</sup> JBREC, Moinabad, <sup>2</sup> Jagruthi Engineering College, JNTUH Affiliated, Telangana, India

## ABSTRACT

This paper explained about switching losses in prescribed circuit. Batteries are the primary energy-storage devices in ground vehicles. Now-a-days battery fed electric drives are commonly being used for electric vehicles Applications, due to various advantages, such as nearly zero emission, guaranteed load levelling, good transient operation and energy recovery during braking operation. To full fill these requirements converters with bidirectional power flow capabilities are required To connect the accumulator (battery) to the dc link of the motor drive system .In the present work closed loop operation of bi directional dc-dc converter feeding a dc series motor. Bi-directional dc-dc converter having some switching Losses. so we have to reduce these switching losses by using Soft switching technique .The confirmation of circuits operation and waveforms, measurement of conversion efficiency, and loss analysis are verified using of MATLAB.

**Keywords** : LLC Resonant Converter, Soft Switching, Zvs And Zcs, Boost Chopper Circuit

## I. INTRODUCTION


### BIDIRECTIONAL DC-DC CONVERTER

Bidirectional DC–DC converters are used to transfer the power between two DC sources in either direction. In the electric vehicle applications, an auxiliary energy storage battery absorbs the regenerated energy fed back by the electric machine In addition, bidirectional dc-dc converter is also required to draw power from the auxiliary battery to boost the high-voltage bus during vehicle starting, accelerate and hill climbing. With its ability to reverse the direction of the current flow and thereby power, the bidirectional dc-dc converters are being increasingly used to achieve power transfer between two dc power sources in either direction. For achieving zero emission, the vehicle can be powered only by batteries or other electrical energy sources. Batteries have widely been adopted in ground Vehicles due to their characteristics in terms of high energy density, compact size, and reliability. This can be applied in Hybrid Electric Vehicle (HEVs) with a battery as an energy storage element to provide desired management of the power flows. In hybrid electric vehicle energy storage devices act as catalysts to provide energy boost. Recently bi-directional dc-dc converter are

widely researched and developed for various applications such as battery charger discharger, electric vehicles and UPS systems. In case of the battery fed electric vehicles (BFEVs), electric energy flows between motor and battery.

Bidirectional dc-dc converters are the key components of the traction systems in Hybrid Electric Vehicles. Recently many Bidirectional dc-dc converter topologies have been reported with soft switching technique to increase the transfer efficiency. Bidirectional converters using coupled inductor were introduced for soft switching technique. For minimizing switching losses and to improve reliability, zero voltage switched technique and zero current switched technique were introduced for Bidirectional converter. This paper deals with the use of Bi-directional d c-dc converter for a battery fed electric vehicle drive system. A closed loop speed control technique of the proposed battery fed electric vehicle is designed and implement using PI controller.

## II. BASIC CONCEPT OF ISOLATED BI-DIRECTIONAL DC-DC CONVERTER

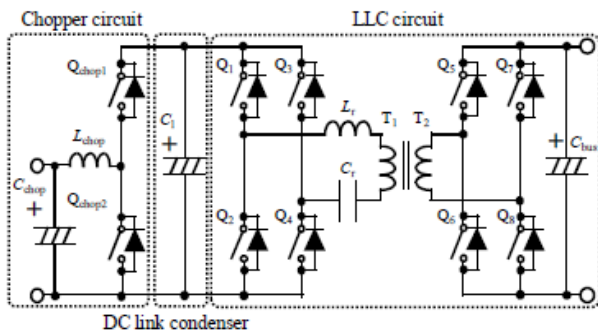

**Figure 1.** Bi-directional DC-DC converter

### A. Circuit Description

Above Fig.1 shows an isolated bidirectional dc-dc converter .which contained bi-directional boost chopper circuit and full bridge type LLC converter. The full bridge type LLC converter is used for isolation. The bi-directional boost chopper circuit consisting of an input capacitor Chop, input inductor  $L_{chop}$ , IGBT switch  $Q_{chop1}$ ,  $Q_{chop2}$ , the full bridge type LLC converter consisting of a DC link capacitor  $C_1$ , at the primary side full bridge type converter consisted of four switches ,and resonant capacitor  $C_r$  and inductor  $L_r$ , transformer, four switches in the secondary side and smoothing capacitor  $C_{bus}$ .

### B. Circuit Principle

Generally,switching of the bi-directional chopper circuit shows hard switching and to prevent from short-circuit, there is dead time for on/off of switch  $Q_{chop1}$ ,  $Q_{chop2}$ . Pulse Wide Modulation (PWM) control and Constant Current (CC) control are adopted for the bi-directional boost chopper circuit and battery current respectively. The isolated bi-directional DC-DC converter is driven with duty 50%. Dead time for the switch  $Q_1$ ,  $Q_4$ ,  $Q_5$ ,  $Q_8$  and  $Q_2$ ,  $Q_3$ ,  $Q_6$ ,  $Q_7$  is set up. On the switching, the ZCS operation is realized with the resonant of the inductor  $L_r$  and capacitor  $C_r$  for the switches  $Q_1 \sim Q_8$ . As mentioned before, the duty for the isolated bi-directional DC-DC converter is fixed so that current and voltage control isn't required.

Now operation principle of isolated bi-directional DC-DC converter is explained. Fig.2 shows the operation stages for discharge and Fig.3 shows the operation stages for charge. The operation stages ofthe isolated bi-directional DC-DC converter are as follows. In this explanation, the operationstages for the charging time of

the isolated bi-directional DC-DC converter and the operationstages of the bi-directional chopper circuit are omitted. And also, the positive voltage and current direction of the capacitor  $C_r$  and inductor  $L_r$  for the resonant is defined as the arrow direction in Fig.2 and Fig.3


## III. MODES OF OPERATION

Mode1: $Q_1$ ,  $Q_4$ ,  $Q_5$ , and  $Q_8$  these four switches are turned on. The resonant voltage of the capacitor  $C_r$  is positively charged in this moment and then resonant capacitor  $C_r$  starts to discharge. After that, the resonant voltage capacitor  $C_r$  crosses zero and completes to charge negatively. The current of inductor  $L_r$  is approximately zero.


Mode2: The switches  $Q_1$ ,  $Q_4$ ,  $Q_5$  and  $Q_8$  , turn on since the Resonant current of the inductor  $L_r$  is zero. For the cause of ZCS operation is realized because there is no current switching. Every switch can be tuned off after that, they are in the dead time period.

Mode3: The beginning of this mode starts from the dead Time period. All the switches are in off state. After finishing the dead time period, the switches  $Q_2$ ,  $Q_3$ ,  $Q_6$ , and  $Q_7$  turn on. At this time, the ZCS operation is achieved since the switch current gradually increases by the resonant capacitor  $C_r$  and inductor  $L_r$ . In this moment, the resonant voltage across the capacitor  $C_r$  is negative voltage.

Mode4: The switches  $Q_2$ ,  $Q_3$ ,  $Q_6$ , and  $Q_7$  turn on and then the resonant capacitor  $C_r$  starts to discharge with resonant. After that, the resonant capacitor  $C_r$  charges positively due to the resonant. In other words, the current and voltage of the resonant capacitors' and inductor  $L_r$  change in contrast to Mode1.

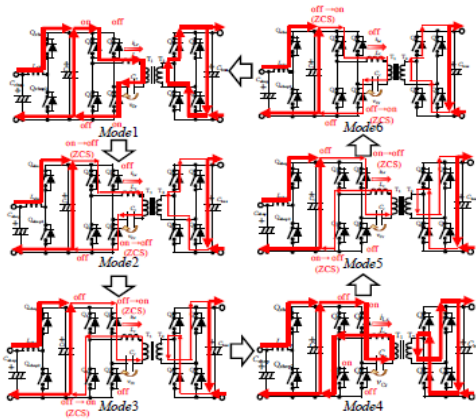

**Figure 2.** Operation stages for discharge

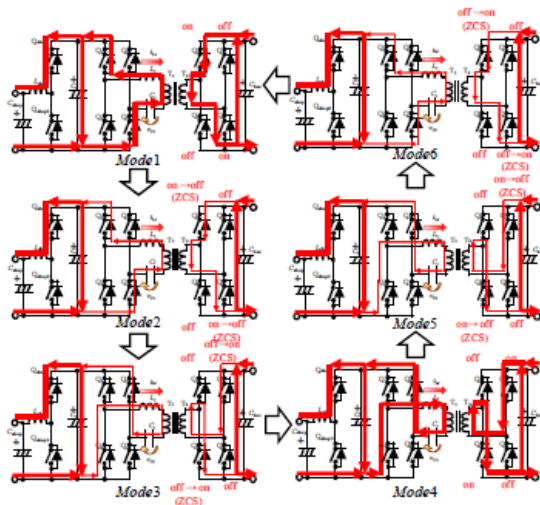

**Figure 3.** Operation stages for charge

Mode5: The resonant current of inductor  $L_r$  becomes Approximately zero, and then the switches  $Q_2$ ,  $Q_3$ ,  $Q_6$ , and  $Q_7$  turn on. Accordingly, the ZCS operation is realized. After that, each of the switches turns off and the mode moves to next mode

Mode6: In the beginning of this mode, all switches are in the off state. Finishing the dead time period, the switches  $Q_1$ ,  $Q_4$ ,  $Q_5$ , and  $Q_8$  turn on. At this Moment, the ZCS operation is realized since the Current gradually rise up with the resonant. After turning on the mode moves to Mode1.

#### IV. EVALUATION FOR 10KW PROTOTYPE

##### A. Circuit Structure of 10kW:


10Kw prototype of the isolated bidirectional dc-dc converter is shown in fig.4 and which is built and tested, circuit structure of 10kw prototype is shown in fig.5.

##### B. Experiment Results

The terminal voltage waveform of IGBT on the bus line is shown in fig.6, the voltage waveform of the resonant capacitor  $C_r$ , and current waveform of the resonant inductor  $L_{rin}$  the charging time of 10kW. And also, Fig.7 describes the terminal voltage waveform of IGBT on the bus line, the voltage waveform of the resonant capacitor  $C_r$ , and current waveform of the resonant inductor  $L_{rin}$  the discharging time of 10kW.




**Figure 4.** Contrivance for 10[kW] type

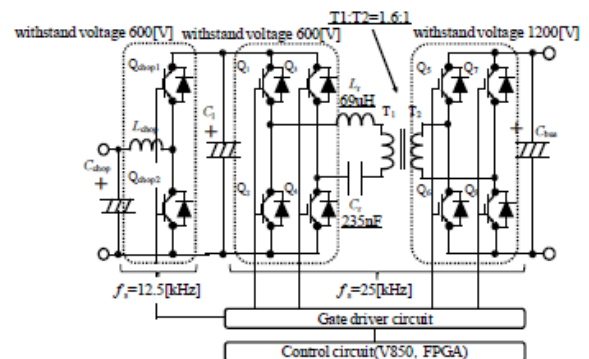


**Figure 5.** [10kw] circuit structure


Above fig.5 shows circuit structure of 10kw prototpe.in this we have to consider transformer ratio 1.6:1 and also used PI controller.

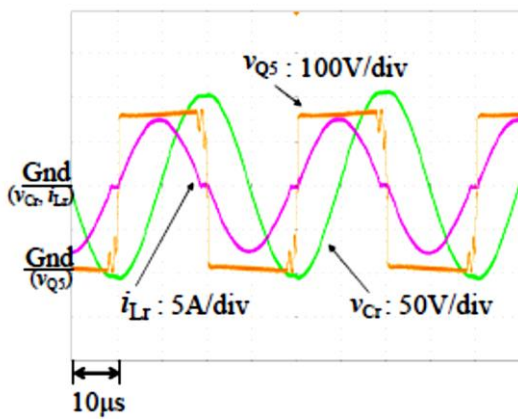

**Figure 6.** Voltage and current waveform of 10[kW] in the charging

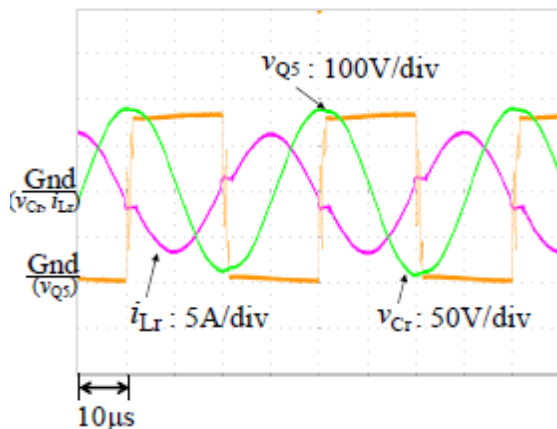


**Figure 7.** Voltage and current waveform of 6.5[kW] in the discharging

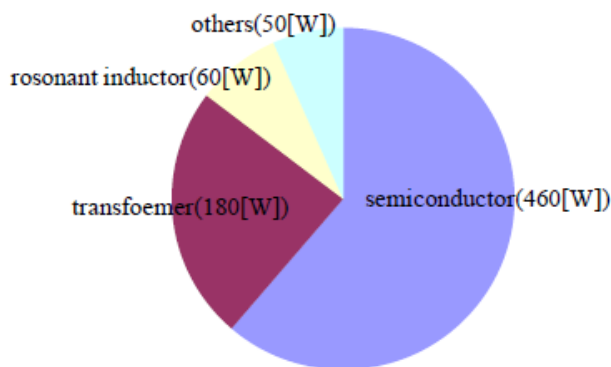

**Figure 8.** Loss analysis result in 10[kW]

Power semiconductor devices occupies 50% of losses so we have to reduce these switching losses and to improve efficiency by using soft switching techning.

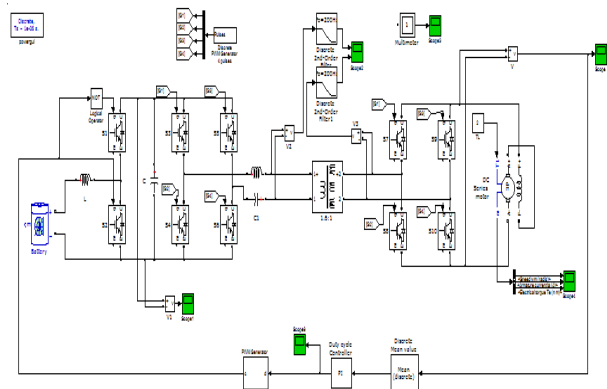


**Figure 9.** matlab model of 10kw prototype

fig.9 shows implementation example of 10kw prototype. Battery is connected at the input side, and also we have to choose dc series motor instead of other motors because of it has high starting torque and this motor running at 1000rpm at the output side. The proposed topology is simulated using MATLAB/Simulink software and it is observed and output is verified. D.C. series motors are ideal for large loads and industrial applications and also used for loads such as cranes, hoists, elevators, trolleys and conveyors, but are also used for automobile starters.


## V. SIMULATION RESULTS

In order to verify the speed of the dc series motor and also voltage at the boost chopper circuit, simulation model has been developed using MATLAB/Simulink. Both the simulation and experimental analysis are done for a bidirectional dc-dc converter with dc series motor. as this topology has been proved to be attractive for large loads and industrial applications.

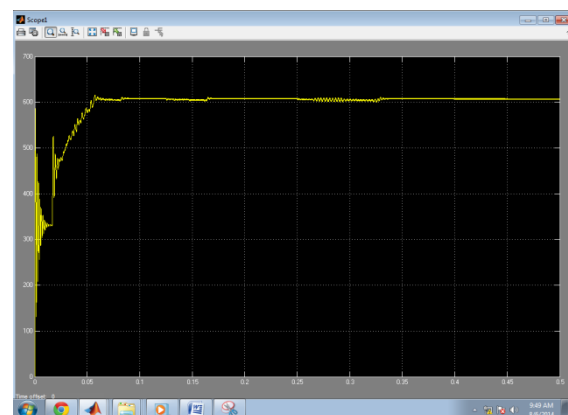


**Figure 10.** voltage versus time at the boost chopper circuit.




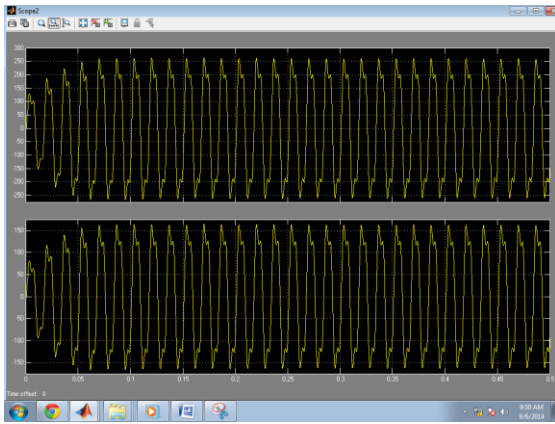

**Figure 11.** Voltage Versus Time at the Primary and Secondary of the Transformer

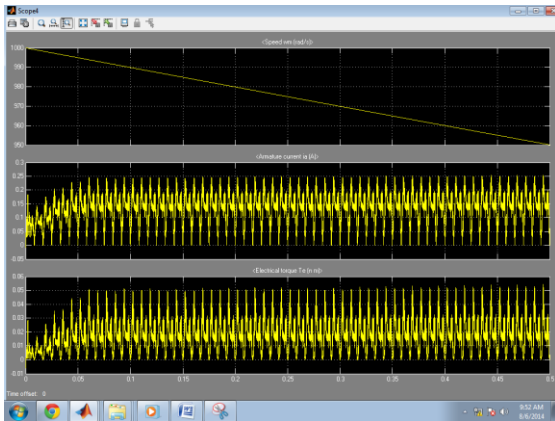

**Figure 12.** Speed, Armature Current And Torque of the dc Series Motor

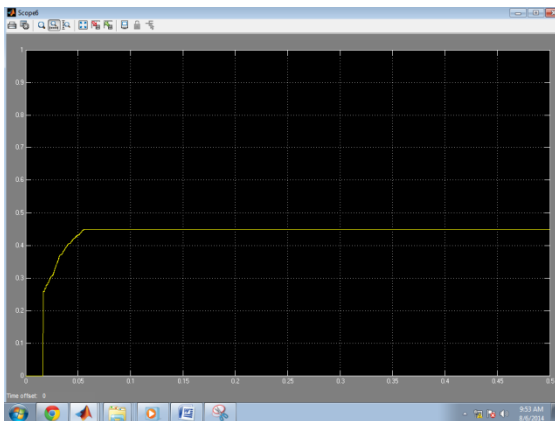

**Figure 13.** Duty Cycle Ratio

## VI. CONCLUSION

In this paper circuit operation, waveforms, loss analysis for an isolated bidirectional dc dc converter and speed of the dc series motor can be observed. In this work we demonstrate the performance of a battery operated electric vehicle system and it shows satisfactory performance at different driving condition. The proposed control technique with PI controller find suitable for this electric drive.

## VII. REFERENCES

- [1]. Wei. Chen and Zhengyu Lu. "A Novel ZVS Set-up Push-Pull Type Isolated LLC Series Resonant Dc-Dc Converter for UPS Systems and Its Topology Variations," IEEE Applied Power Electronics Conference and Exposition (APEC), pp. 1073-1078, Feb. 2008
- [2]. Greg Stahl, Miguel Rodriguez, and Dragan Maksimovic, "A High-Efficiency Bidirectional Buck-Boost DC-DC Converter," IEEE Applied Power Electronics Conference and Exposition (APEC), 1362-1367, Feb. 2012
- [3]. Seung-Ryul Moon, Ki-Chang Lee, Jong-Moo Kim, Dae-Hyun Koo, "Closed-Loop Regenerative Efficiency Testing with Electric Vehicle Bidirectional Dc-dc Converter," IEEE Applied Power Electronics Conference and Exposition (APEC), 2461-2466, Feb. 2012
- [4]. Seung-Ryul Moon, Ki-Chang Lee, Jong-Moo Kim, Dae-Hyun Koo "Novel Modulation Method of a Three-Level Isolated Full-Bridge LLC Resonant DC-DC Converter for Wide-Output Voltage Application," IEEE Power Electronics and Motion Control Conference (EPC/PEMC), DS2b.11-1-DS2b.11-7.