

Study and Analysis of Odour at Baramati Industrial Areas of Pune District

Satish K. Tate¹, P. A. Hangargekar², S. C. Wadne³

¹Assistant Professor, Department of Civil engineering, Parikrama group of Institutions, kashti, Shrigonda, Maharashtra, India

² HOD, Department of Civil engineering, Shri Tuljabhavani College of Engineering, Tuljapur, Maharashtra, India

³Assistant Professor, Department of Civil engineering, Shri Tuljabhavani College of Engineering , Tuljapur, Maharashtra, India

ABSTRACT

In this paper, odour pollution in the environment will be reviewed, including its sources and dispersion, the physical and chemical properties of odour, odour emission regulations in selected countries, odour control technologies as well as the state-of-the-art instrumentation and technology that are necessary to monitor odour, e.g., chemical sensors, olfactometry, gas chromatography, and electronic noses. Since the Law of Offensive Odour Control was enacted, many enterprises have made efforts to prevent odour nuisance. Odour survey was conducted at each factory and characteristics of odour emission for each kind of business were made clear. And many researches and developments have been carried out to confirm reliable technique. In order to remove odourants from exhaust gas, deodorizing plants have been installed at various emission sources gradually. Much formation for odour control could have been stored up for these 30 years. In my seminar, an outline of odour pollution control at various emission sources in India is introduced, that is, a number of newly installed deodorization facility, characteristics of odor emission from each type of business, efficiency of deodorizing equipment, recent trend of the development. The different odour measurement methods were introduced to Indian experts and priority was set to methods which do not need a lot of technical facilities or expertise. It was observed that the most feasible option to carry out an odour survey in India is to use Field Investigation Method. Applied field investigation method was modified to fit India's need to measure different odour intensities based on the experience that clearly recognizable odour is observed as an annoyance.

Keywords : Odour, Odour Pollution, Instrumentation, Olfactometry.

I. INTRODUCTION

Whether pleasant or unpleasant, odour is induced by inhaling air-borne volatile organics or inorganics. Odour is sensory response to the chemicals in the inhaled air. Air quality is affected not only due to conventional air pollutants but also due to unpleasant odours. The usual effect of bad odours is nuisance, but in more serious cases it may lead to feelings of nausea and headache and to other

symptoms that appear to be related to stress. Odour pollution has distinctly different characteristics and is undoubtedly the most complex of all the air pollution problems. Till date, not much attention has been paid towards odour problem in the country. With growing population, industrialization and urbanization, the odour problem has been assuming objectionable proportion. Urbanization without proper sanitation facilities is a major cause of odour problem. Rapidly growing industrialization

has aggravated the problem through odorous industrial operations. Undesirable odour contributes to air quality concerns and affect human lifestyles. Odour is undoubtedly the most complex of all the air pollution problems. Odour pollution has distinctly different characteristics and is undoubtedly the most complex of all the air pollution problems. The land-use in India is complicated, as residential areas develop close to industrial regions the impacts from odorous substances generated from industrial activities (e.g. pulp & paper, distillery, sugar, bulk drug, pharmaceuticals, petrochemical and pesticides) result in increasing public complaints. Besides industrial activities unpleasant odour is generated from open sewer, polluted rivers and municipal solid waste landfills. Unlike conventional air pollutants, odour has distinctly different characteristics, which, to an extent, can be comparable with noise pollution. Similar to noise, nuisance is the primary effect of odour on people.

II. Odour legislation in india

In India emission Limit Values for few industrial sectors which include emission which may be odorous but limit values are not set based on their odor potential. There are for example emission limit values for hydrogen sulfide 5-150 mg/m³, ammonia 5 mg/m³, total organic carbon 0.1-20 mg/m³ and carbon sulfide 125-225 kg/t of produced rayon fibre. Mentioned industrial sectors are large pulp & paper industry, pesticide industry, petroleum and oil refineries, rayon industry and other petrochemical industry. It is mentioned in the Environment Act (1986) that all efforts shall be made to remove unpleasant odor as far as practicable. Odor removal techniques and overview of measurement techniques are presented in the guidance for reducing odor emissions (CPCB 2008).

III. LOCATION FOR ODOR MEASUREMENT

The latitude of Baramati, Maharashtra, India is 18.150663, and the longitude is 74.576782. Baramati, Maharashtra, India is located at India country in the Cities place category with the gps coordinates of 18° 9' 2.3868" N and 74° 34' 36.4152" E. Baramati, Maharashtra, India elevation is 552 meters height, that is equal to 1,811 feet.

IV. Significance of choosing the problem

Names of the industries in the study area.

Name of Industry	Gasses emmissions
Bharat forge Pvt. Ltd.	NH ₃ , H ₂ S, SO ₂
Piaggio Vehicles Pvt. Ltd.	NH ₃ , CL ₂ , H ₂ S
Imsofer manufacturing India Pvt. Ltd.	NH ₃ , H ₂ S, SO ₂ , CL ₂
Schreiber Dynamics Dairies	NH ₃ , H ₂ S, SO ₂ , CL ₂
Baramati Speciality Steels Ltd.	NH ₃ , H ₂ S, SO ₂
Baramati Textile Industries	NH ₃ , H ₂ S, SO ₂ , CL ₂

V. Sensory test method for odor measurement

In our study Arduino uno based odor sensory measurement system is used for measurement of intensity of odor. In Baramati industrial area numbers of odour compounds are emitted from different industries i.e. ammonia, mercaptant, hydrogen sulfide, carbon dioxide, nitrogen etc. This methodology was developed based on existing theoretical framework on evaluation of odour, covering the measurement of gases (H₂S and NH₃), olfactory perception and assessment of climate conditions at the time of measurement. The methodology was validated by evaluating odor at 9

different points. In the sensory method use arduino uno based gas measurement system it consist two sensor (ammonia (NH₃) MQ136 and hydrogen sulfide (H₂S) MQ135 sensor), display (16x2) and power 5 volts.

Arduino Uno

Arduino/Genuino Uno is a microcontroller board based on the ATmega328P. It has 14 digital input/output pins (of which 6 can be used as PWM outputs), 6 analog inputs, a 16 MHz quartz crystal, a USB connection, a power jack, an ICSP header and a reset button. It contains everything needed to support the microcontroller; simply connect it to a computer with a USB cable or power it with an AC-to-DC adapter or battery to get started.



Fig.1 Arduino Uno based odor sensory measurement system

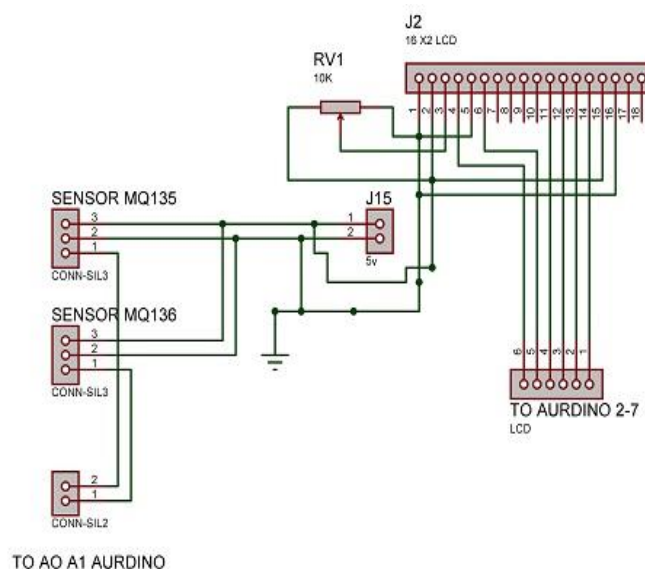


Fig.2 Circuit diagram of Arduino Uno based sensor

VI. Temperature & humidity variation within Baramati

Time	7 am	9 am	11 am	1 pm	3 pm	5 pm	7 pm
Temp.	22°	24°	28°	31°	34°	36°	36°
Humidity	24%	18%	9%	8%	7%	7%	8%

VII. Observation of NH₃ and H₂S gas at three location in MIDC Baramati area in the month of march


Table 1. Tandalwadi (2.2 Km S-W side)

Time	Ammonia gas		Remark	Hydrogen sulphide gas		Remark
	dB	ppm		dB	ppm	
		(dB/1024)* 300			(dB/1024)* 300	
8am	35	102.80	Irritated eyes, throat and mucous membran	60	17.57	Tearing of the eyes, Headaches or loss of sleep
10am	35	104.56		61	17.86	
12am	35	102.51		57	16.69	

2pm	35 4	103.68	es	55	16.10
4pm	35 9	105.15		56	16.40
6pm	36 2	106.02		59	17.28
7pm	36 8	107.81		61	17.87

Table 2. Gojubavi (3.2 Km W Side)

Maximum average intensity of NH3 & H2S gas with graphical representation

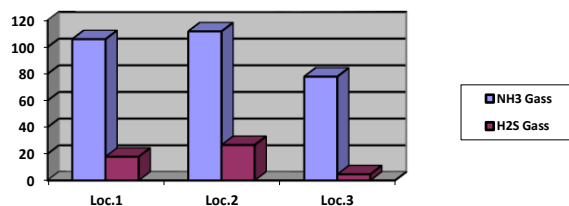

VIII. CONCLUSIONS

Dynamic olfactometry represents the standardized objective method for the determination of odour concentration, it is affected by some limitations. First of all dynamic olfactometry provides point odour concentration data, however, it is not sufficient to evaluate completely a case of olfactory nuisance because it does not allow one to perform continuous and field measurements, useful for monitoring the industrial processes causing odour emissions. Moreover, dynamic olfactometry considers the whole odour mixture and do not discriminate the single chemical compounds and their contribution to the odour concentrations. Odour samples are difficult to store, because of their instability, and, therefore, require rapid time of analysis. Finally, as it is well-known, Arduino based odor sensory system is too time-consuming and quite expensive and moreover frequency and duration of analysis are limited. On the other hand, electronic noses present lower analysis costs and quick results and they allow one to carry out continuous monitoring in the field nearby sources and receptors. After a training step, electronic noses are able to preview the class of an unknown sample and then to associate environmental odours to a specific source. Since each technique satisfies only a part of the problems of odour monitoring, many authors have focused their attention on carrying out comparisons and integrations between olfactometry and E-Nose results. These applications show the

Time	Ammonia gas		Remark	Hydrogen sulphide gas		Remark
	dB	ppm		dB	ppm	
		(dB/1024)* 300			(dB/1024)* 300	
7am	380	111.30	Irritated eyes, throat and mucous membranes	90	26.36	Tearing of the eyes, Headaches or loss of sleep
9am	378	110.71		87	25.48	
11am	372	108.95		83	24.31	
1pm	368	107.78		86	25.18	
3pm	375	109.83		89	26.06	
5pm	379	111.00		90	26.36	
7pm	382	111.88		91	26.65	

Table 3. Choudharwadi (2.1 Km E-S side)

Time	Ammonia gas		Remark	Hydrogen sulphide gas		Remark
	dB	ppm		dB	ppm	
		(dB/1024)* 300			(dB/1024)* 300	
7am	270	79.08	Irritated eyes, throat and mucous membranes	15	4.39	Tearing of the eyes, Headaches or loss of sleep
9am	262	76.73		14	4.10	
11am	257	75.27		13	3.80	
1pm	251	73.51		13	3.80	
3pm	248	72.63		13	3.80	
5pm	253	74.10		14	4.10	
7pm	266	77.91		16	4.68	

opportunity of using more than one approach for describing and understanding olfactory nuisance cases as completely as possible.

IX. REFERENCES

- [1]. Journal of Indian Association for Environmental Management, Vol 29, No. 1, February, 2002 (ISSN 0970-8480).
- [2]. Nakamoto T., Y. Isaka, T. Ishige and T. Moriizumi. 2000. Odour sensing system using preconcentrator with variable temperature sensors and Actuators B 69.
- [3]. Stevens S.S., The psychophysics of sensory Function. *American Scientist*,48:226-253.\1960.
- [4]. Real time Monitoring of Odour Emission Regions, Cases and methods, Scientific Lab. Centre co. LTD, KOSORE Workshop pp. 35-50, 2.
- [5]. BEDBOROUGH D.R and TROTT P.E. (1979). The sensory measurement of odours by dynamic dilution, Warren Spring Laboratory.
- [6]. Bardsley T and Demetriou J, 1997, "Odour measurement That Don't Stink", National Workshop on Odour measurement Standardization, Sydney, 20-22August 1997.

Cite this article as :

Satish K. Tate, P. A. Hangargekar, S. C. Wadne, "Study and Analysis of Odour at Baramati Industrial Areas of Pune District", *International Journal of Scientific Research in Science and Technology (IJSRST)*, Online ISSN : 2395-602X, Print ISSN : 2395-6011, Volume 6 Issue 3, pp. 105-109, May-June 2019.

Journal URL : <http://ijsrst.com/IJSRST196322>